


POOL DEPTH MARKINGS
N.T.S.

NOTES:

- BACKGROUND AND NUMBERS TO BE CONTRASTING COLORS TO EACH OTHER AND ALSO TO POOL DECK.
- DECK MARKINGS TO BE CERAMIC TILE AND PROVIDED WITH A NO-SLIP SAND LIKE FINISH.
- VERTICAL DEPTH MARKERS ARE TO BE PERMANENTLY INSTALLED ADHESIVE MARKERS, INSTALLED ON THE 6" VERTICAL PORTION OF THE STAINLESS STEEL GUTTER, ABOVE THE WATER LEVEL.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE DEPTH OF THE POOL WATER, MEASURED THREE FEET FROM THE POOL WALL, PRIOR TO PLACEMENT OF THE DEPTH MARKERS.


NO DIVING MARKER
N.T.S.

*MARKINGS TO BE CERAMIC TILE AND PROVIDED WITH A NO-SLIP SAND LIKE FINISH.

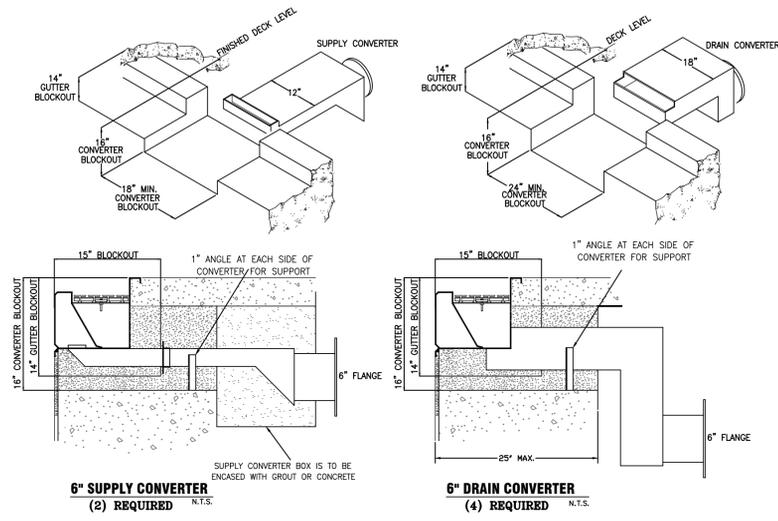

6" SUPPLY CONVERTER
(2) REQUIRED
N.T.S.

6" DRAIN CONVERTER
(4) REQUIRED
N.T.S.

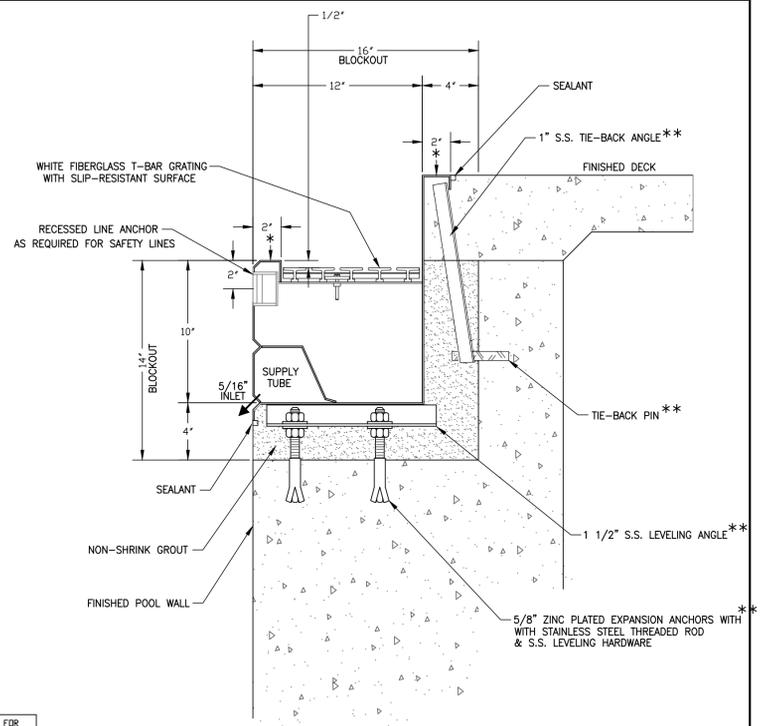


VCRS-DL-1012-6DWL-SW TYPICAL GUTTER SECTION
N.T.S.

GUTTER MATERIAL = T304L STAINLESS STEEL WITH A NO.3 FINISH ON ALL EXPOSED SURFACES.


* INDICATED SURFACES HAVE A SKID RESISTANT SURFACE.

** GUTTER INSTALLER IS TO INSTALL GUTTER ANCHORAGE, AS DETAILED, AT 6" IN FROM CORNERS AND AT 4'-0" MAX. SPACING AROUND PERIMETER.

GROUTING AND SEALING OF GUTTER BY OTHERS.

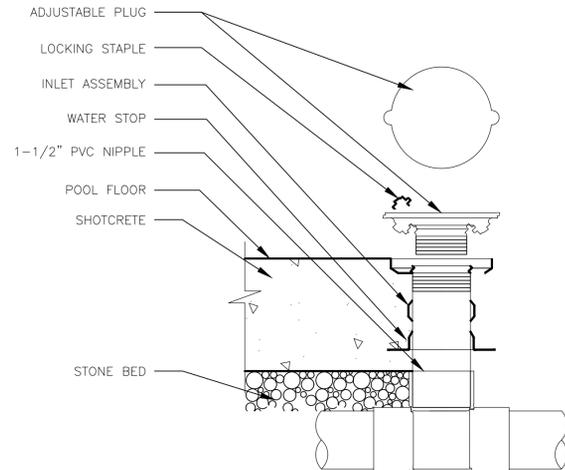


FLOOR INLET DETAIL
N.T.S.

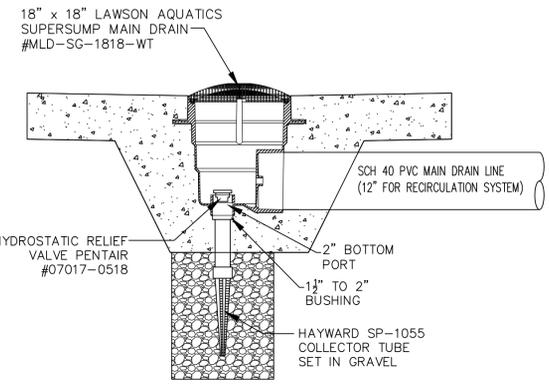


SWIMMING POOL MAIN DRAIN DETAIL
N.T.S.

NOTE:
MAIN DRAIN GRATES MUST BE SECURELY IN PLACE AT ALL TIMES. THE MAIN DRAIN GRATES SHALL NOT BE REMOVABLE WITHOUT THE USE OF TOOLS.

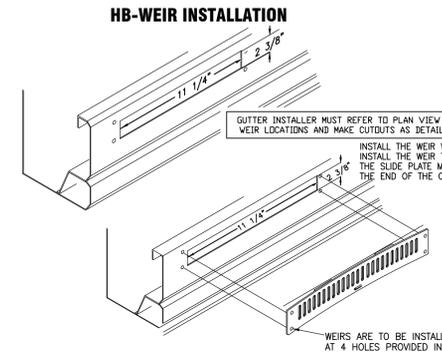

TYPICAL GUTTER SECTION
N.T.S.

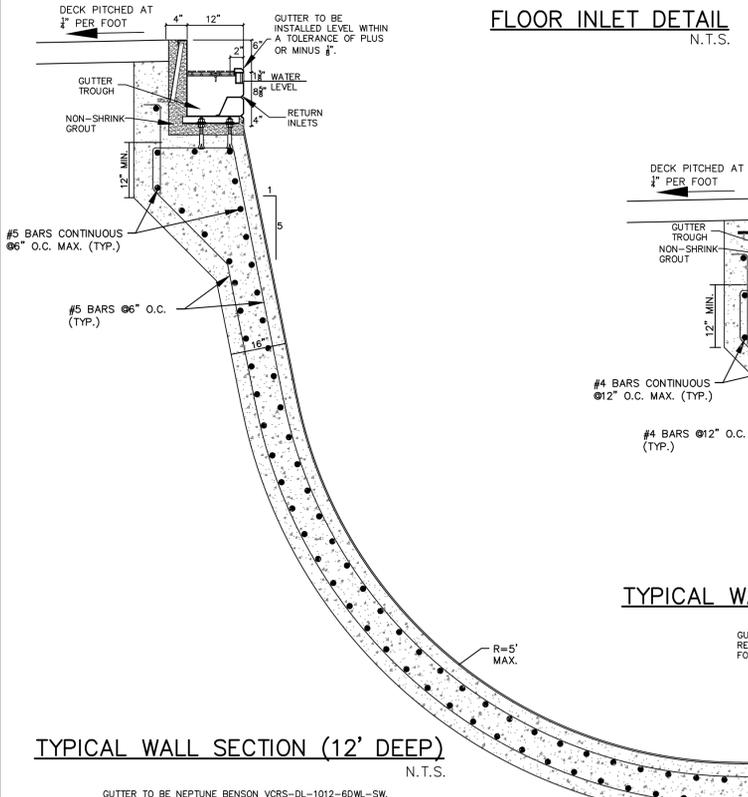


TYPICAL WALL SECTION (3' TO 5' DEEP)
N.T.S.

GUTTER TO BE NEPTUNE BENSON VCRS-DL-1012-6DWL-SW. REFER TO MANUFACTURERS SPECIFICATIONS AND DETAILS FOR DETAILED INSTALLATION INFORMATION.

TYPICAL WALL SECTION (12' DEEP)
N.T.S.

GUTTER TO BE NEPTUNE BENSON VCRS-DL-1012-6DWL-SW. REFER TO MANUFACTURERS SPECIFICATIONS AND DETAILS FOR DETAILED INSTALLATION INFORMATION.


THE WALL TO FLOOR RADIUS IS TO INCREASE PROPORTIONALLY FROM 3" AT A 5' WATER DEPTH TO 8" AT A 12' WATER DEPTH.

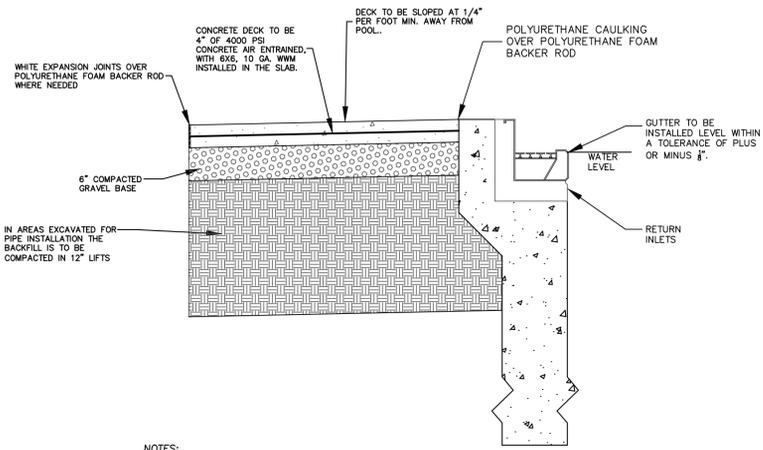

CONCRETE DECK DETAIL
N.T.S.

NOTES:

- FINISH TO BE BROOM FINISH.
- CONTROL JOINTS TO BE 1/4" DEEP BY 1/4" WIDE SPACED AT 5' O.C..
- INSTALL 1/2" PRE-MOLDED EXPANSION JOINT AT 25' O.C. AND WHERE SLAB IS AGAINST POOL COPING.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUPPLYING AND INSTALLING ALL NECESSARY ANCHOR SOCKETS FOR THE POOL LADDERS AND HANDRAILS AS WELL AS ANY OTHER APPURTENANCES NEEDING TO BE REPLACED WITHIN THE DECK AREA.
- COLD JOINTS ARE TO BE ADEQUATELY REINFORCED, CONNECTING THE EXISTING CONCRETE TO THE NEW CONCRETE TO PREVENT NONUNIFORM SETTLEMENT.

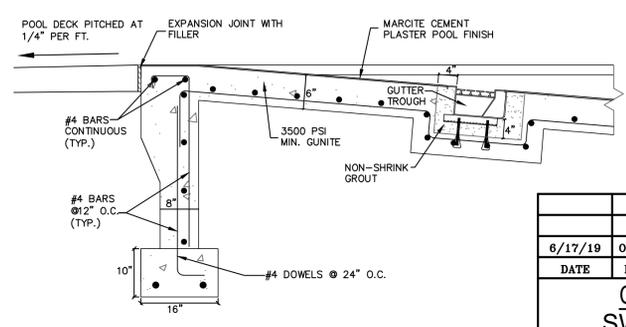

TYPICAL WALL SECTION WITH FOOTING
N.T.S.

NOTE:
* TO BE USED WHERE POOL FLOOR WILL BE LESS THAN 4' BELOW GRADE.

FOR HEALTH DEPARTMENT APPROVAL

THIS SHEET IS INCOMPLETE AND INVALID WITHOUT EACH AND EVERY OTHER SHEET LISTED IN THE TITLE BOX UNDER THE HEADING O.C.H.D. SHEET NO. _ OF _.

6/17/19	ORIGINAL PREPARATION DATE
DATE	DESCRIPTION
CENTRAL VALLEY SWIMMING POOL	
TOWNSHIP OF WOODBURY ORANGE COUNTY, NEW YORK	
SWIMMING POOL DETAILS	
DRAWING TITLE	
SIGNATURE _____ DATE _____	
UNAUTHORIZED ALTERATION OR ADDITION TO A PLAN BEARING A LICENSED LAND SURVEYOR'S OR PROFESSIONAL ENGINEER'S SEAL IS A VIOLATION OF SECTION 7209, SUB-DIVISION 2 OF THE N.Y. STATE EDUCATION LAW.	
JOHN PETROCCIONE P.E.	
LICENSE NO. 078516 129 NEPTUNE DRIVE, MONROE, NEW YORK 10950 (845) 782-7725	
SCALE	PROJECT
AS NOTED	19148.01
CAD REFERENCE	WOODBURY CVP PLAN
OCHD DWG. NO.	DWG. NO.
8 of 8	8 of 8